


## SPECIFICATIONS

## OVERVIEW

Main	Model	PI3070i
	OS	Linux 4.9.11 QT based
	Processor	Cortex A7 528MHz
Display	Size	7"
	Screen	TFT
	Resolution	800*480
	Color	16,000k colors
	Brightness (cd/m <sup>2</sup> )	250
	Backlight	LED
	Backlight Lifetime	50,000 hours
Storage	Touch Panel	High precision four-wire resistive
	Memory	128 MB
	Flash	128 MB
	SD Card Slot	--
RTC	USB Port	USB2.0 Host + USB2.0 Client
	Real-time clock	Yes
	Calendar	Yes
I/O Port	COM1	CN1:RS422/RS485 CN2: RS232
	COM2	--
	COM3	--
	Ethernet	--
Power	CANopen	--
	Wi-Fi	--
	4G LTE	--
	Rated Power	< 8W
Enclosure	Power Voltage	DC 24V
	Input range	DC 12 ~ 28V
	Shell Color	Grey
	Shell Material	Plastic+ABS(Polycarbonate)
Environment	Overall Size (mm)	201.2W*147.2H*39.0D
	Mounting Size (mm)	192.0W*138.0H
	Mounting Method	Panel Mount
	Weight (Kg)	0.74
Software	Working Temperature	-10 ~ 55°C
	Storage Temperature	-20 ~ 70°C
	Humidity	10 ~ 85%RH (Non-condensing)
	Vibration Resistance	10 ~ 25 Hz (X, Y, Z direction 2G/30 minutes)
Certificates	Cooling	Air Cooling
	Programming	PIStudio
	Remote Access	--
	Email Alarm	--
Software	IP Camera	--
	Audio Output	--
	Video Player	--
	IP Code	IP65 (Front panel)
Certificates	CE	CE Marked
	FCC	FCC Class A
	UL	--



## DIMENSION

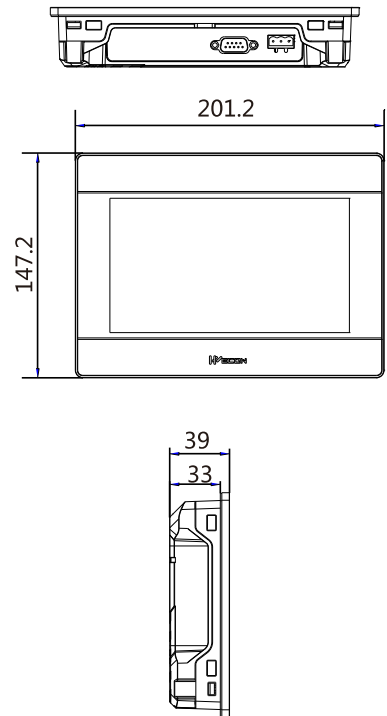

## SOFTWARE

